SCOPE OF WORKS – MÔ TẢ CÔNG VIỆC

1. SCOPE OF WORK

A. Cleaning, removing oyster and marine living (estimated depth for removing oyster is around 3 meters)

Contractor to provide service to remove all oyster and marine living in NS2PC Jetty area, included 5 fender and 160 piles as below drawing:

- **Fender:**

5 permanent fender systems (3 on access flat form and 2 on breasting dolphin) using Sumitomo Hyper Omega type (HOM 1600 x80)

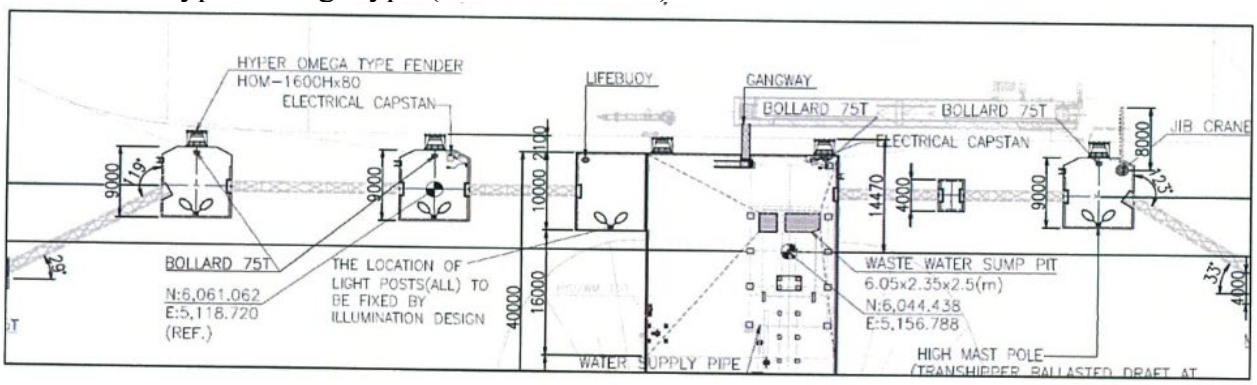

- **Jetty pile:**

There are 160 piles with diameters from 600mm – 900mm.

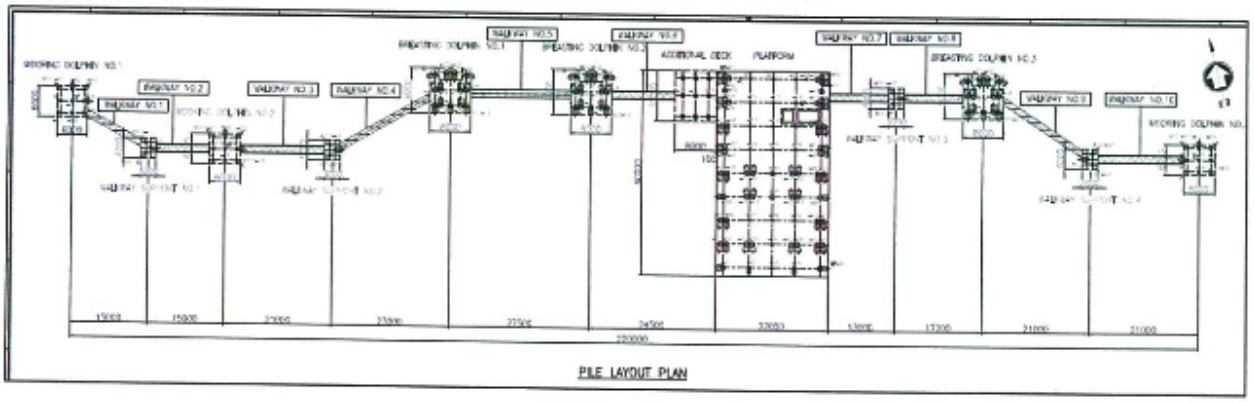

B. Wrapping geotextile fabric around piles (160 piles)

Contractors provide materials and perform installation (wrapping) geotextile fabric around piles. The geotextile fabric should be polyester material with thickness over 2.5mm. Specification/dimension as following:

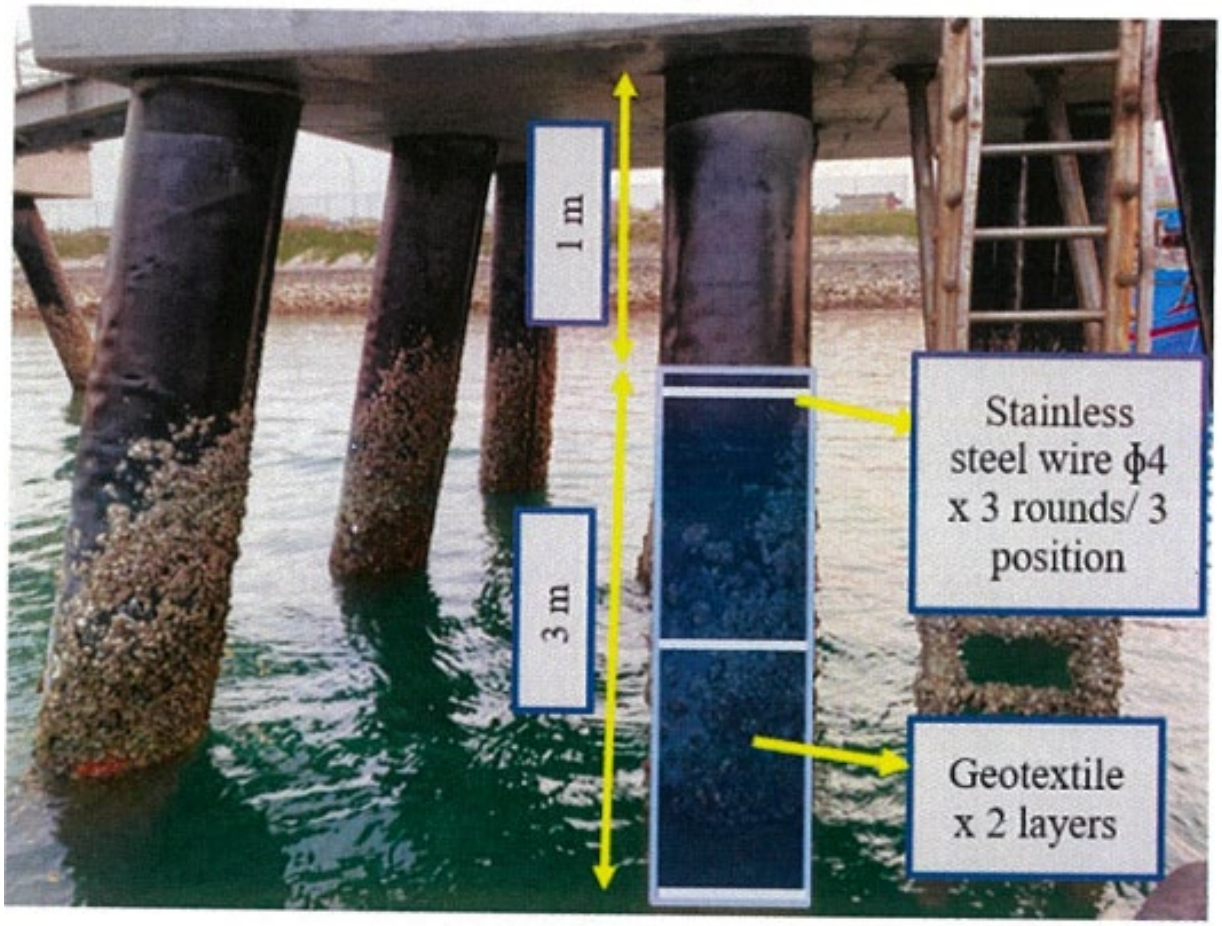
1 m
3 m
Stainless steel wire ϕ4 x 3 rounds/ 3 position
Geotextile x 2 layers